



SPEKTRA

# acoustic doors





#### PRODUCT FEATURES:

- Reinforced 45mm thick soundproof door page.
- Patented elastic door frame.
- German 30 mins fire-resistant sound insulation core board.
- German thermal expansion smokeproof airtight strip.
- German original automatic soundproof latch.
- Automatic open-close damping hinge.
- Airtight silence door lock.

#### SOUND INSULATION PERFORMANCE:

36dB

#### FINISH:

PU Eco-friendly paint

#### ECO-FRIENDLY:

Zero Formaldehyde emission; PU Eco-friendly paint

#### SIZE:

2200mm (H) x 900mm (W) x 120mm - 240mm (T)  
\*suitable for wall thickness of 120mm - 240mm

#### WEIGHT:


Door ≤47kg  
Frame ≤27kg

#### AVAILABLE COLORS:



Ivory white Creamy white Light green Light gray Dark gray

#### SOUND REDUCTION INDEX:

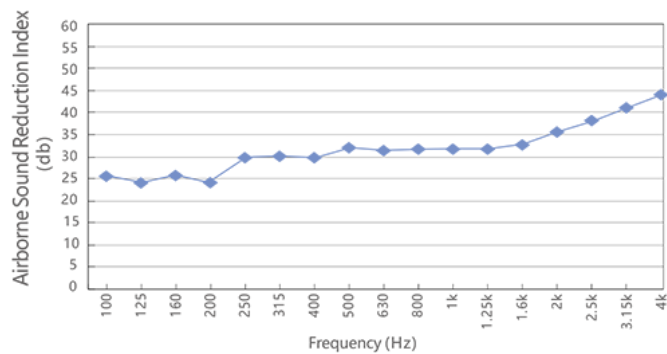

Easy installation



Flexibly adjustable



Accurate positioning





#### PRODUCT FEATURES:

- Professional 50mm thick soundproof door
- Patented elastic door frame
- German 30 mins fire-resistant sound insulation core board
- German thermal expansion smokeproof airtight strip
- Ultra-thin sound insulation doorstep
- Automatic open-close damping hinge
- Airtight silence door lock

#### SOUND INSULATION PERFORMANCE:

40dB

#### FINISH:

PU Eco-friendly paint

#### ECO-FRIENDLY:

Zero Formaldehyde emission; PU Eco-friendly paint

#### SIZE:

2200mm (H) x 900mm (W) x 150mm - 300mm (T)  
\*suitable for wall thickness of 150mm - 300mm

#### WEIGHT:


Door ≤60kg  
Frame ≤43kg

#### AVAILABLE COLORS:



Ivory white Creamy white Light green Light gray Dark gray

#### SOUND REDUCTION INDEX:

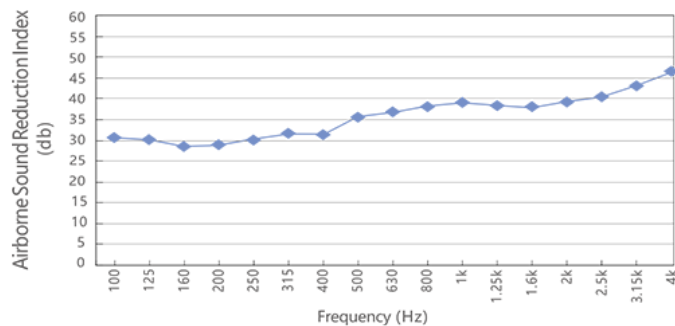

Easy installation



Flexibly adjustable



Accurate positioning





#### PRODUCT FEATURES:

G45J integrates the latest material technology and structural design, using advanced sound insulation modeling technology with the Soundbox patented technology of elastic door frame.

- Reinforced 45mm thick soundproof door
- Patented elastic door frame.
- German 30 mins fire-resistant sound insulation core board.
- German thermal expansion smokeproof airtight strip.
- German original automatic soundproof latch.
- Automatic open-close damping hinge.
- Airtight silence door lock.

#### SOUND INSULATION PERFORMANCE:

36dB

#### FINISH:

PU Eco-friendly paint

#### ECO-FRIENDLY:

Zero Formaldehyde emission; PU Eco-friendly paint

#### SIZE:

2200mm (H) x 900mm (W) x 120mm - 240mm (T)

\*suitable for wall thickness of 120mm - 240mm

#### AVAILABLE COLORS:



30mins fire retardant




Smokeproof airtight strips



Magnetic sound insulation

#### SOUND REDUCTION INDEX:

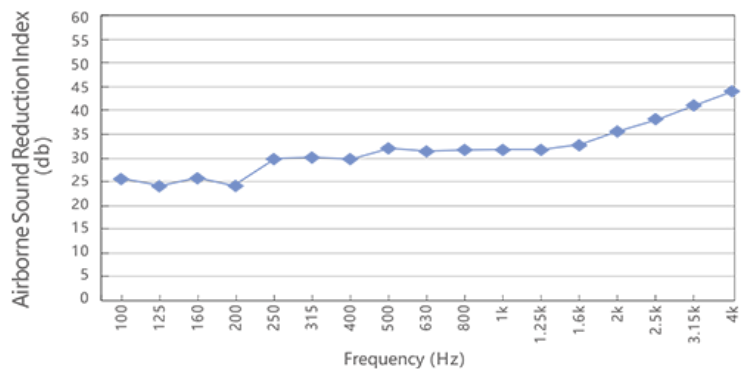



#### PRODUCT FEATURES:

- Professional 50mm thick soundproof door page.
- Silent sound insulation system solution
- German 30 mins fire-resistant sound insulation core board.
- German thermal expansion smokeproof airtight strip
- Automatic open-close damping hinge.
- Airtight silence door lock.
- Vacuum soundproof observation window

#### SOUND INSULATION PERFORMANCE:

38dB

#### FINISH:

Stain and scratch-resistant PP finishing

#### ECO-FRIENDLY:

Zero Formaldehyde emission; PU Eco-friendly paint

#### SIZE:

2200mm (H) x 900mm (W) x 150mm - 300mm (T)  
\*suitable for wall thickness of 150mm - 300mm

#### WEIGHT:

Door ≤56kg  
Frame ≤38kg

#### AVAILABLE COLORS:



30mins fire retardant




Smokeproof airtight strips



Magnetic sound insulation

#### SOUND REDUCTION INDEX:

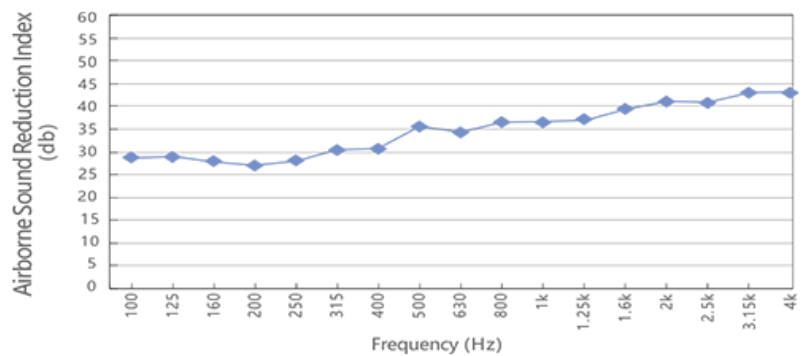



#### PRODUCT FEATURES:

G65 soundproof doors with a double-step and seamless frame design achieve more solid structure, seamless fit, all while providing amazing soundproof characteristics.

- Professional 65mm thick soundproof door
- Patented elastic door frame.
- German 60 mins fire-resistant sound insulation core board.
- German thermal expansion smokeproof airtight strip.
- German corner sound insulation
- Ultra-thin sound insulation doorstep
- German six-dimensional adjustable hinge.
- Airtight silence door lock.
- German automatic soundproof latch.
- Round soundproof observation window.

#### SOUND INSULATION PERFORMANCE:

43dB

#### FINISH:

Stain and scratch-resistant PP finishing

#### ECO-FRIENDLY:

Zero Formaldehyde emission; PU Eco-friendly paint

#### SIZE:

2200mm (H) x 900mm (W) x 200mm - 400mm (T)

\*suitable for wall thickness of 200mm - 400mm

#### AVAILABLE COLORS:



S212

S210

S198

S206


S203

#### WEIGHT:

Door ≤80kg

Frame ≤50kg

#### SOUND REDUCTION INDEX:

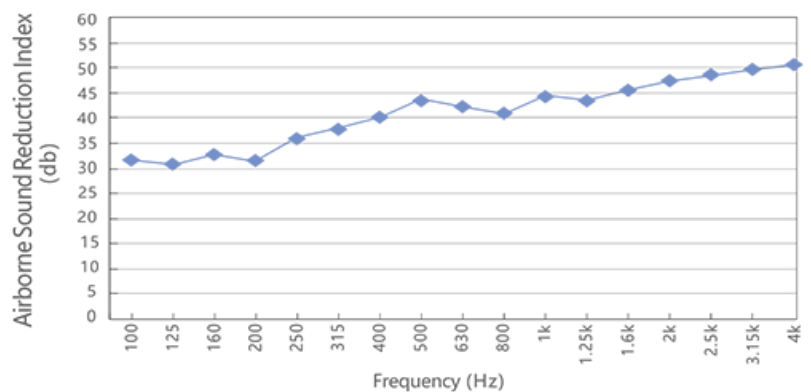



#### PRODUCT FEATURES:

- Professional 50mm thick soundproof door
- Silent sound insulation system solution
- Vacuum soundproof window
- German 30 mins fire-resistant sound insulation core board
- German thermal expansion smokeproof airtight strip
- German original automatic soundproof latch
- Automatic open-close damping hinge
- Stain and scratch-resistant PP finishing
- Stainless steel handle

#### SOUND INSULATION PERFORMANCE:

38dB

#### FINISH:

Stain and scratch-resistant PP finishing


#### ECO-FRIENDLY:

Zero Formaldehyde emission; PU Eco-friendly paint

#### SIZE:

≤2400mm (H) x 950mm (W) x 240mm (T)

#### SOUND REDUCTION INDEX:

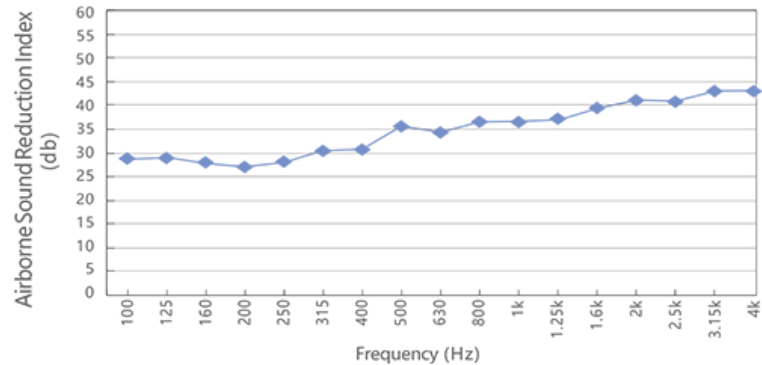

#### AVAILABLE COLORS:



S212 S207 BZ912 S210 S206

